

11/08/00

PC803 U.S. PTO

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.63(b))

Attorney Docket No.

2000 1537A

Total Pages

1

First Named Inventor or Application Identifier

Akio KUROBE et al.

Express Mail Label No.:

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

1. [X] Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. [X] Specification [Total Pages - 75]  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R & D  
- Reference to Microfiche Appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure

6. Microfiche Computer Program (Appendix)
7. [ ] Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. [ ] Computer Readable Copy  
b. [ ] Paper Copy (identical to computer copy)  
c. [ ] Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

3. [X] Drawing(s) (35 USC 113) [Total sheets - 12]  
4. [X] Oath or Declaration [Total Pages - 3]  
a.1. [X] Newly executed (original or copy)  
a.2. [ ] Unexecuted  
b. [ ] Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
(Note Box 5 below)  
i. [ ] DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).
5. [ ] Incorporation By Reference  
(usable if Box 4b is checked)  
The entire disclosure of the prior application, from which  
a copy of the oath or declaration is supplied under Box  
4b, is considered as being part of the disclosure of the  
accompanying application and is hereby incorporated by  
reference therein.

8. [X] Assignment Papers (cover sheet & document(s))  
9. [ ] 37 CFR 3.73(b) Statement [ ] Power of Attorney  
(when there is an assignee)  
10. [ ] English Translation Document (if applicable)  
11. [X] Information Disclosure Statement (IDS)/PTO-1449  
[X] Copies of IDS Citations  
12. [ ] Preliminary Amendment  
13. [X] Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)  
14. [ ] Small Entity Statement(s)  
[ ] Statement filed in prior application, Status still proper and desired  
15. [X] Certified Copy of Priority Document(s)  
(if foreign priority is claimed)  
16. [X] Other Proposed Drawing Amendment (Fig. 7)

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:  
[ ] Continuation [ ] Divisional [ ] Continuation-in-part (CIP) of prior Application No.

## 18. CORRESPONDENCE ADDRESS

WENDEROTH, LIND & PONACK, L.L.P.  
2033 "K" Street, N.W.  
Suite 800  
Washington, D.C. 20006  
Phone:(202) 721-8200  
Fax:(202) 721-8250

November 8, 2000

THE COMMISSIONER IS AUTHORIZED  
TO CHARGE ANY DEFICIENCY IN THE  
FEES FOR THIS PAPER TO DEPOSIT  
ACCOUNT NO. 23-0975

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :  
Akio KUROBE et al. :  
Serial No. NEW : Attn: APPLICATION BRANCH  
Filed November 8, 2000 : Attorney Docket No. 2000\_1537A

DATA TRANSMISSION METHOD AND  
SYSTEM, AND DEVICE USED THEREFOR

PATENT OFFICE FEE TRANSMITTAL FORM

Assistant Commissioner for Patents,  
Washington, DC 20231

Sir:

Attached hereto is a check in the amount of \$1,488.00 to cover Patent Office fees relating to filing the following attached papers:

New application ..... \$1,448.00

Assignment for Recordal ..... \$ 40.00

A duplicate copy of this paper is being submitted for use in the Accounting Division, Office of Finance.

*The Commissioner is authorized to charge any deficiency or to credit any overpayment associated with this communication to Deposit Account No. 23-0975, with the EXCEPTION of deficiencies in fees for multiple dependent claims in new applications.*

Respectfully submitted,

Akio KUROBE et al.

By Charles R. Watts  
Charles R. Watts  
Registration No. 33,142  
Attorney for Applicants

CRW/asd  
WENDEROTH, LIND & PONACK, L.L.P.  
2033 K St., N.W., Suite 800  
Washington, D.C. 20006  
Telephone (202) 721-8200  
November 8, 2000

[Check No. 4071]  
2000\_1537A

TITLE OF THE INVENTION

DATA TRANSMISSION METHOD AND SYSTEM, AND DEVICE USED THEREFOR

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to data transmission methods and systems, and devices used therefor and, more specifically, to a method, system, and device for transmitting isochronous data  
10 such as digitalized audio and video by using a radio signal as a transmission medium. Such transmission takes place in a media access control for LAN, or in a data link layer and network layer.

Description of the Background Art

15 Conventionally, in attempt of realizing a network enabling transmission of isochronous data such as digitalized audio and video by using a radio signal as a transmission medium, a technique of transmitting data over a millimetric radio wave ATM-LAN has been disclosed in Shingakugihou (IEICE Technical Report)  
20 RCS97-207, January, 1998. Described briefly in the following is the millimetric radio wave ATM-LAN.

FIG. 11 is a diagram structurally showing the conventional millimetric radio wave ATM-LAN. In FIG. 11, APs (AP1 to AP3) each denote an access point and serve as a master or central station.  
25 STAs each denote a terminal, and is controlled by any one AP.

Communication between any STA and another STA is always carried out via the AP. The AP is connected to a wire-link network such as ATM. Therefore, the AP, in some cases, communicates with any STA controlled by other AP also connected to the wire-link device  
5 or network.

The AP controls every STA in the area communicable by using millimetric waves (e.g., 60GHz band) as the medium for radio transmission, and also manages radio transmission resources. Specifically, the AP inquires about an access request from any  
10 STA under control, and allocates, to the STA, the resource for radio transmission. For such allocation, the AP gives higher priority on isochronous data such as audio and video so that the transmission of such data completes within a predetermined time period with allowance. On the other hand, to the asynchronous  
15 data, allowed to be transmitted with some delay, the AP allocates the radio transmission resources so as to allocate the time that will remain after the isochronous data transmission is complete .

The AP then transmits a polling, in a predetermined cycle calculated by itself, to the STA allocated with the radio  
20 transmission resource for isochronous data, and permits data transmission therefrom. Upon permission, the STA that has received the polling from the AP transmits a data frame, and the AP receives the data frame. If a network address of the received data frame is addressed to other STA under control, the AP  
25 transmits the data frame thereto. If the network address is

addressed to any STA in the wire-link network, the AP transmits the data frame thereto.

FIG. 12 is a diagram showing a sequence when an arbitrary STA in FIG. 11 transmits isochronous data to other STA via the AP. Hereinafter, the STA of the transmitting end and the STA of the receiving end are referred to as a transmitting STA and a receiving STA, respectively. In FIG. 12, the upper part shows a sequence for normal transmission and the lower part shows a sequence for transmission failed in its first transmission.

Referring to the upper part of FIG. 12, the AP first transmits a polling to the transmitting STA. In response thereto, the transmitting STA transmits data. The AP receives and transmits the data to the receiving STA.

Referring to the lower part of FIG. 12, the AP transmits a polling to the transmitting STA, waits for a predetermined time passes, and if not receiving data from the transmitting STA, transmits another polling to the transmitting STA and waits for data transmission therefrom.

Using the millimetric radio wave ATM-LAN described above, a full-duplex operation path must be formed in order to enable simultaneous use of an ascending transmission path directed from STA to AP and a descending transmission path directed from AP to STA. Herein, the full-duplex operation path is formed frequency-division-multiplexing using two radio channels.

Such bidirectional communication (full-duplex operation)

through the frequency-division-multiplexing is easy to be implemented in a band having wide transmission range such as millimetric wave band. In the microwave band, however, usually only one channel can be used because a transmission speed in each  
5 channel reaches some megabits per second. Therefore, in the microwave band, one channel is generally multiplexed in a time-sharing manner so as to achieve bidirectional communication (half-duplex operation). In such case, a preamble bit, or the like, needs to be added at the head of an ascending burst and a  
10 descending burst for synchronization in radio transmitting/receiving devices. The preamble bit, in many cases, exceeds 100 bits. The overhead caused by the preamble bit is thus increased to an amount that can not be ignored with respect to data amount of control information such as polling. Consequently,  
15 the response time in the half-duplex operation disadvantageously reaches a level several times longer than that presumed in the full-duplex operation.

Further, in comparison of transmission quality with wire transmission, radio transmission shows increment in a bit error  
20 rate by more than two digits, which should be taken into account. Different from the bit error rate, a frame error rate, i.e., a rate of occurrence of error somewhere in a data frame, much depends on the number of bytes of the data frame. The more the number of bytes of the data frame is, the worse the frame error rate  
25 becomes.

The maximum frame lengths defined by the IEEE 802.3 standard and the IEEE 802.5 standard for the wire-link LAN are 1,500 bytes and 4,429 bytes, respectively. In comparison, the maximum frame length for the radio transmission is generally around 256 bytes.

5 In this case, overhead caused by the data relevant to control information such as polling, in addition to that caused by the preamble bit, can not be ignored.

A relay device may be placed in between AP and STA in such case that the radio wave can not be directly transmitted due to  
10 any obstruction or too long distance therebetween. Even in this case, if frequency that can be used for radio transmission is limited, the communication between the AP and the relay device, and between the relay device and the STA are all done in the same radio transmission frequency. Accordingly, ascending and  
15 descending data in each section of transmission path should be multiplexed in a time-sharing manner to avoid data collision during transmission. Herein, by adopting the medium access control of a centralized-control-type using the polling, transmission control is easily done in a time-sharing manner. In  
20 such case, however, the transmission band is further reduced by half of the half-duplex operation. The overhead caused by the preamble bit and data relevant to the control information such as polling thus becomes more serious.

25 SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to provide a data transmission method and system, and a device used therefor, capable of reducing overhead caused by the polling and also efficiently utilizing the resource for radio transmission without  
5 signal collision in the ascending and descending paths in the half-duplex operation.

The present invention has the following features to achieve the object above.

A first aspect of the present invention is directed to a  
10 data transmission method for communication between first and second transmission devices transmitting/receiving a data frame by using a single transmission path, comprising the steps of:

detecting, at the first transmission device, that a carrier used for signal transmission of the data frame does not exist on  
15 the transmission path for confirming that the transmission path is available,

transmitting one or more data frames in sequence from the first transmission device when the carrier does not exist,

detecting, at the second transmission device, that the  
20 carrier does not exist on the transmission path for confirming that the transmission path is available when received one or more of the data frames transmitted from the first transmission device, and

transmitting one or more data frames in sequence from the  
25 second transmission device when the carrier does not exist.



As described above, in the first aspect, with such structure that sequentially transmitting n-frames (where n is an arbitrary natural number) in response to a transmission right granted by a single polling, efficiency is improved by n-times. Further, 5 the second terminal station can promptly move to the transmission procedure without collision with any frame transmitted by the first terminal station.

A second aspect of the present invention is directed to a data transmission method for communication between first and 10 second transmission devices transmitting/receiving a data frame via a relay device by using a single transmission path, comprising the steps of:

detecting, at the relay device, when received one or more data frames transmitted from the first transmission device, an 15 error in each of the received data frames;

setting, at the relay device, only the data frame in which no error was detected as a data frame to be transmitted,

detecting, at the relay device, that the carrier does not exist on the transmission path for confirming that the 20 transmission path is available; and

transmitting one or more data frames in sequence from the relay device to the second transmission device when the carrier does not exist.

As described above, in the second aspect, with such 25 structure that sequentially transmitting n-frames in response to

a transmission right granted by a single polling, efficiency is improved by  $n$ -times. Moreover, since the relay station is so structured as not to transmit error-detected frames, the efficiency is further improved. Still more, the relay station  
5 can promptly move to the transmission procedure without collision with receiving frames.

A third aspect of the present invention is directed to a data transmission method for communication between first and second transmission devices transmitting/receiving a data frame  
10 including a transmission timer value indicating a total frame time of data frames subsequent thereto by using a single transmission path, comprising the steps of:

sequentially transmitting  $n$ -data-frames (where  $n$  is an arbitrary natural number) each including the transmission timer  
15 value set to indicate  $(n - k)$  frame time (where  $k$  is an arbitrary natural number showing sequential order of transmission) from the first transmission device;

detecting, at the second transmission device that has received one or more of the data frames each including the  
20 transmission timer value, the transmission timer value included in an error-free data frame among the received data frames;

managing, at the second transmission device, an elapse of the total frame time of the subsequent data frames by using the detected transmission timer value and managing an elapse of a time  
25 period by using a predetermined initial value when no transmission

timer value is detected, for confirming that the transmission path is available; and

transmitting one or more data frames in sequence from the second transmission device when the transmission path is confirmed being available.

As described above, in the third aspect, with such structure that sequentially transmitting n-frames in response to a transmission right granted by a single polling, efficiency is improved by n-times. Further, without using carrier-sensing in the physical layer, the second terminal station can promptly move to the transmission procedure without collision with any frame transmitted by the first terminal station.

According to a fourth aspect, in the third aspect, the transmission path is implemented by radio transmission in an arbitrary frequency band.

As described above, in the fourth aspect, a transmission medium limited in the number of channels can be effectively utilized.

According to a fifth aspect, in the third aspect, the initial value is determined as the maximum time required for error-free transmission of all of the data frames.

As described above, in the fifth aspect, transmission is started after an elapse of the maximum suspension time assumed for error-free transmission of all of the data frames. In this manner, even if no data frame is received, transmission can be

surely started.

According to a sixth aspect, in the third aspect,

in the step of detecting the transmission timer value, the transmission timer value is detected from every error-free data  
5 frame among the data frames received by the second transmission device; and

in the step of confirming that the transmission path is available, an elapse of the total frame time of the subsequent data frames is started to be managed every time the transmission  
10 timer value is detected.

As described above, in the sixth aspect, the transmission timer value is sequentially detected from every error-free data frame among the received data frames, and by using the detected timer value, a total frame time of the subsequent data frames is  
15 updated. Accordingly, as the number of the subsequent data frames becomes smaller, the updated total frame time becomes more accurate. Further, the transmission timer value is correctly updated even if any data frame is lost or discarded due to error.

A seventh aspect of the present invention is directed to  
20 a data transmission method for communication between first and second transmission devices transmitting/receiving a data frame including a transmission timer value indicating a total frame time of data frames subsequent thereto via a relay device by using a single transmission path, comprising the steps of:

25 sequentially transmitting n-data-frames (where n is an

arbitrary natural number) each including the transmission timer value set to indicate  $(n - k)$  frame time (where  $k$  is an arbitrary natural number showing sequential order of transmission) from the first transmission device;

5        detecting, at the relay device that has received one or more of the data frames each including the transmission timer value, an error in each of the received data frames;

      detecting, at the relay device, the transmission timer value included in an error-free data frame among the received data  
10 frames;

      setting, at the relay device,  $m$ -data frames (where  $m$  is a natural number not more than  $n$ ) in which no error was detected as data frames to be transmitted;

      setting, at the relay device, the transmission timer value  
15 for each of the data frames set as the data frames to be transmitted so as to indicate  $(m - k)$  frame time;

      managing, at the relay device, an elapse of the total frame time of the subsequent data frames by using the detected transmission timer value for confirming that the transmission  
20 path is available; and

      transmitting one or more data frames in sequence from the relay device to the second transmission device when the transmission path is confirmed being available.

      As described above, in the seventh aspect, with such  
25 structure that sequentially transmitting  $n$ -frames in response to

a transmission right granted by a single polling, efficiency is improved by n-times. Moreover, since the relay station is so structured as not to transmit error-detected frames, the efficiency is further improved. Still more, the relay station  
5 can promptly move to the transmission procedure without collision with receiving frames even if a plurality of frames among the n-frames are failed to be received due to radio transmission error.

According to an eighth aspect, in the seventh aspect,  
10 the transmission path is implemented by radio transmission in an arbitrary frequency band.

As described above, in the eighth aspect, a transmission medium limited in the number of channels can be effectively utilized.

15 According to a ninth aspect, in the seventh aspect, in the step of detecting the transmission timer value, the transmission timer value is detected from every error-free data frame among the data frames received by the relay device; and

in the step of confirming that the transmission path is  
20 available, an elapse of the total frame time of the subsequent data frames is started to be managed every time the transmission timer value is detected.

As described above, in the ninth aspect, the transmission timer value is sequentially detected from every error-free data  
25 frame among the received data frames, and by using the detected

timer value, a total frame time of the subsequent data frames is updated. Accordingly, as the number of the subsequent data frames becomes smaller, the updated total frame time becomes more accurate. Further, the transmission timer value is correctly  
5 updated even if any data frame is lost or discarded due to error.

A tenth aspect of the present invention is directed to a data transmission system for communication between first and second transmission devices transmitting/receiving a data frame by using a single transmission path, wherein

10 the first and second transmission devices each comprise:

a receiving portion for receiving the data frame;

a carrier detecting portion for detecting that a carrier used for signal transmission of the data frame does not exist on the transmission path; and

15 a transmitting portion for transmitting the data frame, and

the second transmission device that has received one or more of the data frames transmitted from the first transmission device detects, by the carrier detecting portion provided therein, that  
20 the carrier does not exist on the transmission path to confirm that the transmission path is available, and then transmits one or more data frames in sequence.

As described above, in the tenth aspect, with such structure that sequentially transmitting n-frames (where n is an arbitrary  
25 natural number) in response to a transmission right granted by

a single polling, efficiency is improved by n-times. Further, the terminal station being the reception side can promptly move to the transmission procedure without collision with any frame transmitted by an arbitrary terminal station.

5           An eleventh aspect of the present invention is directed to a data transmission system for communication between first and second transmission devices transmitting/receiving a data frame via a relay device by using a single transmission path, wherein the first and second transmission devices each comprise:

10               a first receiving portion for receiving the data frame;

              a first carrier detecting portion for detecting that a carrier used for signal transmission of the data frame does not exist on the transmission path; and

15               a first transmitting portion for transmitting the data frame,

              the relay device comprises:

              a second receiving portion for receiving the data frame;

20               a second carrier detecting portion for detecting that the carrier used for signal transmission of the data frame does not exist on the transmission path;

              an error detecting portion for detecting an error in the data frame received by the second receiving portion;

25               a received frame analyzing portion for setting the



data frame in which no error was detected by the error detecting portion as a data frame to be transmitted; and

a second transmitting portion for transmitting the data frame, and

5 the relay device, when received one or more of the data frames transmitted from the first transmission device, detects, by the second carrier detecting portion provided therein, that the carrier does not exist on the transmission path to confirm that the transmission path is available, and then transmits one  
10 or more of the data frames to be transmitted to the second transmission device in sequence.

As described above, in the eleventh aspect, with such structure that sequentially transmitting n-frames in response to a transmission right granted by a single polling, efficiency is  
15 improved by n-times. Moreover, since the relay station is so structured as not to transmit error-detected frames, the efficiency is further improved. Still more, the relay station can promptly move to the transmission procedure without collision with receiving frames.

20 A twelfth aspect of the present invention is directed to a data transmission system for communication between first and second transmission devices transmitting/receiving a data frame including a transmission timer value indicating a total frame time of data frames subsequent thereto by using a single transmission  
25 path, wherein

the first and second transmission devices each comprise:

a receiving portion for receiving the data frame including the transmission timer value;

a transmission timer acquiring portion for acquiring  
5 the transmission timer value included in the data frame received by the receiving portion;

a transmission timer for suspending transmission for a frame time indicated by the transmission timer value acquired by the transmission timer acquiring portion, and when none of the  
10 timer values is acquired, suspending transmission for a time indicated by a predetermined initial value;

a transmitting frame constructing portion for constructing a data frame to be transmitted including the transmission timer value so set as to indicate the total frame  
15 time of the data frames subsequent thereto; and

a transmitting portion for transmitting the data frame to be transmitted constructed by the transmitting frame constructing portion, and

the second transmission device, when received one or more  
20 of the data frames transmitted from the first transmission device, confirms, by the transmission timer provided therein, that the transmission path is available through an elapse of the time of suspending transmission, and then transmits one or more of the data frames to be transmitted constructed by the transmitting  
25 frame constructing portion in sequence.

As described above, in the twelfth aspect, with such structure that sequentially transmitting n-frames in response to a transmission right granted by a single polling, efficiency is increased by n-times. Further, without using carrier-sensing in  
5 the physical layer, the terminal station being the reception side can promptly move to the transmission procedure without collision with any frame transmitted by an arbitrary terminal station.

According to a thirteenth aspect, in the twelfth aspect, the transmission path is implemented by radio transmission  
10 in an arbitrary frequency band.

As described, in the thirteenth aspect, a transmission medium limited in the number of channels can be effectively utilized.

According to a fourteenth aspect, in the twelfth aspect,  
15 the initial value is determined as the maximum time required for error-free transmission of all of the data frames.

As described above, in the fourteenth aspect, transmission is started after an elapse of the maximum suspension time assumed for error-free transmission of all of the data frames.  
20 In this manner, even if no data frame is received, transmission can be surely started.

A fifteenth aspect of the present invention is directed to a data transmission system for communication between first and second transmission devices transmitting/receiving a data frame  
25 including a transmission timer value indicating a total frame time

of data frames subsequent thereto via a relay device by using a single transmission path, wherein

the first and second transmission devices each comprise:

a first receiving portion for receiving the data  
5 frame including the transmission timer value;

a first transmission timer acquiring portion for  
acquiring the transmission timer value included in the data frame  
received by the first receiving portion;

a first transmission timer for suspending  
10 transmission for a frame time indicated by the transmission timer  
value acquired by the first transmission timer acquiring portion ,  
and when none of the timer values is acquired, suspending  
transmission for a time indicated by a predetermined initial  
value;

15 a first transmitting frame constructing portion for  
constructing a data frame to be transmitted including the  
transmission timer value so set as to indicate the total frame  
time of data frames subsequent thereto; and

a first transmitting portion for transmitting the  
20 data frame to be transmitted constructed by the first transmitting  
frame constructing portion,

the relay device comprises:

a second receiving portion for receiving the data  
frame including the transmission timer value;

25 an error detecting portion for detecting an error in

the data frame received by the second receiving portion;

a received frame analyzing portion for setting the data frame in which no error was detected by the error detecting portion as a data frame to be transmitted;

5 a second transmission timer acquiring portion for acquiring the transmission timer value included in an error-free data frame among the received data frames;

a second transmission timer for suspending transmission for a frame time indicated by the transmission timer value acquired by the second transmission timer acquiring portion,

10 a second transmitting frame constructing portion for constructing a data frame to be transmitted including the transmission timer value so set as to indicate the total frame time of the data frames subsequent thereto; and

a second transmitting portion for transmitting the data frame to be transmitted constructed by the second transmitting frame constructing portion, and

the relay device, when received one or more of the data frames transmitted from the first transmission device, confirms, by the second transmission timer provided therein, that the transmission path is available through an elapse of the time of suspending transmission, and then transmits one or more of the data frames to be transmitted constructed by the second transmitting frame constructing portion to the second

transmission device in sequence.

As described above, in the fifteenth aspect, with such structure that sequentially transmitting n-frames in response to a transmission right granted by a single polling, efficiency is improved by n-times. Moreover, since the relay station is so structured as not to transmit error-detected frames, the efficiency is further improved. Still more, the relay station can promptly move to the transmission procedure without collision with receiving frames even if a plurality of frames among the n-frames are failed to be received due to radio transmission error.

According to a sixteenth aspect, in the fifteenth aspect, the transmission path is implemented by radio transmission in an arbitrary frequency band.

As described above, in the sixteenth aspect, a transmission medium limited in the number of channels can be effectively utilized.

A seventeenth aspect of the present invention is directed to a transmission device for transmitting/receiving a data frame by using a single transmission path, comprising:

- a receiving portion for receiving the data frame;
- a carrier detecting portion for detecting that a carrier used for signal transmission of the data frame does not exist on the transmission path; and
- a transmitting portion for transmitting the data

frame, and

when received one or more data frames, detecting, by the carrier detecting portion provided therein, that the carrier does not exist on the transmission path to confirm that the  
5 transmission path is available, and then transmitting one or more data frames in sequence.

As described above, in the seventeenth aspect, with such structure that sequentially transmitting n-frames (where n is an arbitrary natural number) in response to a transmission right  
10 granted by a single polling, efficiency is improved by n-times. Further, the terminal station can promptly move to the transmission procedure without collision with any frame transmitted by other terminal stations.

An eighteenth aspect of the present invention is directed  
15 to a relay device for relaying data transmission from a first transmission device transmitting a data frame to a second transmission device by using a single transmission path, comprising:

a receiving portion for receiving the data  
20 frame;

a carrier detecting portion for detecting that a carrier used for signal transmission of the data frame does not exist on the transmission path;

an error detecting portion for detecting an error in  
25 the data frame received by the receiving portion;

a received frame analyzing portion for setting only the data frame in which no error was detected by the error detecting portion as a data frame to be transmitted; and

a transmitting portion for transmitting the data  
5 frame to be transmitted, and

when received one or more data frames transmitted from the first transmission device, detecting, by the carrier detecting portion, that the carrier does not exist on the transmission path to confirm that the transmission path is available, and then  
10 transmitting one or more of the data frames to be transmitted to the second transmission device in sequence.

As described above, in the eighteenth aspect, with such structure that sequentially transmitting n-frames in response to a transmission right granted by a single polling, efficiency is  
15 improved by n-times. Moreover, since the relay station is so structured as not to transmit error-detected frames, the efficiency is further improved. Still more, the relay station can promptly move to the transmission procedure without collision with receiving frames.

20 A nineteenth aspect of the present invention is directed to transmission device for transmitting/receiving a data frame including a transmission timer value indicating a total frame time of data frames subsequent thereto by using a single transmission path, comprising:

25 a receiving portion for receiving the data frame



including the transmission timer value;

a transmission timer acquiring portion for acquiring the transmission timer value included in the data frame received by the receiving portion;

5 a transmission timer for suspending transmission for a frame time indicated by the transmission timer value acquired by the transmission timer acquiring portion, and when none of the timer values is acquired, suspending transmission for a time indicated by a predetermined initial value;

10 a transmitting frame constructing portion for constructing a data frame to be transmitted including the transmission timer value so set as to indicate the total frame time of the data frames subsequent thereto; and

a transmitting portion for transmitting the data  
15 frame to be transmitted constructed by the transmitting frame constructing portion, and

when received one or more data frames, confirming, by the transmission timer, that the transmission path is available through an elapse of the time of suspending transmission, and then  
20 transmitting one or more of the data frames to be transmitted constructed by the transmitting frame constructing portion in sequence.

As described above, in the nineteenth aspect, with such structure that sequentially transmitting n-frames (where n is an  
25 arbitrary natural number) in response to a transmission right

granted by a single polling, efficiency is improved by n-times. Further, without using carrier-sensing in the physical layer, the terminal station being the reception side can promptly move to the transmission procedure without collision with any frame  
5 transmitted by an arbitrary terminal station.

According to a twentieth aspect, in the nineteenth aspect, the initial value is determined as the maximum time required for error-free transmission of all of the data frames.

As described above, in the twentieth aspect, transmission  
10 is started after an elapse of the maximum suspension time assumed for error-free transmission of all of the data frames. In this manner, even if no data frame is received, transmission can be surely started.

A twenty-first aspect of the present invention is directed  
15 to a relay device for relaying data transmission from a first transmission device transmitting a data frame including a transmission timer value indicating a total frame time of data frames subsequent thereto, to a second transmission device by using a single transmission path, comprising:

20 a receiving portion for receiving the data frame including the transmission timer value;

an error detecting portion for detecting an error in the data frame received by the receiving portion;

a received frame analyzing portion for setting only  
25 the data frame in which no error was detected by the error detecting

portion as a data frame to be transmitted;

a transmission timer acquiring portion for acquiring the transmission timer value included in the data frame received by the receiving portion;

5 a transmission timer for suspending transmission for a frame time indicated by the transmission timer value acquired by the transmission timer acquiring portion;

a transmitting frame constructing portion for constructing a data frame to be transmitted including the  
10 transmission timer value so set as to indicate the total frame time of the data frames subsequent thereto; and

a transmitting portion for transmitting the data frame to be transmitted constructed by the transmitting frame constructing portion, and

15 when received one or more data frames transmitted from the first transmission device, confirming, by the transmission timer, that the transmission path is available through an elapse of the time of suspending transmission, and then transmitting one or more of the data frames to be transmitted constructed by the  
20 transmitting frame constructing portion to the second transmission device in sequence.

As described above, in the twenty-first aspect, with such structure that sequentially transmitting n-frames in response to a transmission right granted by a single polling, efficiency is  
25 increased by n-times. Moreover, since the relay station is so

structured as not to transmit error-detected frames, the efficiency is further improved. Still more, the relay station can promptly move to the transmission procedure without collision with receiving frames even if a plurality of frames among the  
5 n-frames are failed to be received due to radio transmission error.

These and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when  
10 taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing the structure of a system in which a data transmission method according to a first  
15 embodiment of the present invention applied, focusing on the structure of a central unit 10;

FIG. 2 is a block diagram showing the structure of the system in which the data transmission method according to the first embodiment applied, focusing on the structure of a terminal 20;

FIG. 3 is a block diagram showing the structure of the system in which the data transmission method according to the first embodiment applied, focusing on the structure of a relay device  
20 30;

FIGS. 4A and 4B are diagrams exemplarily showing the  
25 structure of bursts used in the data transmission method according

to the first embodiment;

FIG. 5 is a diagram showing a sequence in the data transmission method according to the first embodiment;

FIG. 6 is a block diagram showing the structure of a system  
5 in which a data transmission method according to a second embodiment of the present invention applied, focusing on the structure of the central unit 10;

FIG. 7 is a block diagram showing the structure of the system in which the data transmission method according to the second  
10 embodiment applied, focusing on the structure of the terminal 20;

FIG. 8 is a block diagram showing the structure of the system in which the data transmission method according to the second embodiment, focusing on the structure of the relay device 30;

FIGS. 9A and 9B are diagrams exemplarily showing the  
15 structure of bursts used in the data transmission method according to the second embodiment;

FIG. 10 is a diagram showing a sequence in the data transmission method according to the second embodiment;

FIG. 11 is a diagram showing the configuration of a  
20 conventional millimetric radio wave ATM-LAN; and

FIG. 12 is a diagram showing a sequence when an arbitrary STA on the conventional millimetric radio wave ATM-LAN transmits isochronous data to other STA via an AP.

25 DESCRIPTION OF THE PREFERRED EMBODIMENTS

(First Embodiment)

By referring to FIGS. 1 to 5, described are a method, system, and device for data transmission according to a first embodiment of the present invention. FIGS. 1 to 3 are block diagrams showing the structure of the system adopting the data transmission method according to the first embodiment. FIGS. 4A and 4B are diagrams exemplary showing the structure of bursts used in the data transmission method according to the first embodiment. FIG. 5 is a diagram showing a sequence in the data transmission method according to the first embodiment.

Referring to FIGS. 1 to 3, in the system adopting the data transmission method according to the first embodiment, a central unit 10 and a terminal 20 are connected with each other via a relay device 30 and a radio transmission path 40.

Referring to FIG. 1, the central unit 10 includes an RF transmitting portion 101 transmitting a signal to the radio transmission path 40, an RF receiving portion 103 receiving a signal from the radio transmission path 40, base band processing portions 102 and 104, a transmitting frame constructing portion 105 receiving transmitting data, a polling cycle counting portion 106 receiving a local clock, a received frame analyzing portion 107, an error detecting portion 108, and a carrier detecting portion 109 receiving a signal from the RF receiving portion 103.

Referring to FIG. 2, the terminal 20 includes an RF transmitting portion 201 transmitting a signal to the radio

transmission path 40, an RF receiving portion 203 receiving a signal from the radio transmission path 40, base band processing portions 202 and 204, a transmitting frame constructing portion 205 receiving transmitting data, a received frame analyzing portion 206, an error detecting portion 207, a carrier detecting portion 208 receiving a signal from the RF receiving portion 203.

Referring to FIG. 3, the relay device 30 is connected each other with the central unit 10 and the terminal 20 via the radio transmission path 40. The relay device 30 includes an RF transmitting portion 301 transmitting a signal to the radio transmission path 40, an RF receiving portion 303 receiving a signal from the radio transmission path 40, base band processing portions 302 and 304, a transmitting frame constructing portion 305, a received frame analyzing portion 306, an address conversion portion 307, a carrier detecting portion 308, and an error detecting portion 309.

Next, by referring to FIGS. 4A and 4B, described is the structure of the bursts used in the data transmission method according to the first embodiment. FIG. 4A shows the structure of a descending burst which is transmitted from the central unit 10 to the terminal 20. FIG. 4B shows the structure of an ascending burst which is transmitted from the terminal 20 to the central unit 10.

At the head of each burst, a preamble bit PR is added to establish bit synchronization on the receiving end. The preamble

bit PR is followed by a unique word UW, which is a region for frame synchronization. UW is followed by a data link address of a sender SA and then a data link address of a destination (receiving end) DA. DA is followed by SNA and DNA, which are regions for network addresses for routing.

For transmission from the central unit 10 to the terminal 20 via the relay device 30, the central unit 10 sets the data link address and the network address of its own to SA and SNA, respectively. The central unit 10 then sets the data link address of the relay device 30 to DA, and the network address of the terminal 20 to DNA. The relay device 30 receives the burst with such addresses being set, converts SA into the data link address of its own, converts DA into the network address of the terminal 20, and then reconstructs the frame for transmission.

In FIG. 4A, "Poll" is a control region indicating the polling. In FIG. 4B, "Data" is video data, audio data, or computer data. "CRC" is a code for detecting information error in the range from SA to Poll in the descending burst, and from SA to Data in the ascending burst. Since the data link address is converted in the relay device 30, CRC is recalculated therein. Herein, the ascending burst in FIG. 4B is presumably structured by 16 frames numbered from 0 to 15.

Referring back to FIG. 1, the procedure of polling transmission, i.e., descending transmission, is described. In the central unit 10, the transmitting frame constructing portion



105 receives transmission data and constructs a frame. In the constructed frame, SA and SNA are set as the data link address and the network address of the central unit 10, DA is set as the data link address of the relay device 30, and DNA is set as the  
5 network address of the terminal 20. Thus constructed frame is outputted to the base band processing portion 102.

The polling cycle counting portion 106 receives an internal local clock, and with the received clock, counts a predetermined polling cycle. The polling cycle counting portion 106 controls  
10 the base band processing portion 102 based on the result of the counting. By such control, the central unit 10 controls timing for polling transmission.

The carrier detecting portion 109 detects that the RF receiving portion 103 is receiving a carrier and informs the base  
15 band processing portion 102 of the detection. Under the control by polling cycle counting portion 106 and the carrier detecting portion 109, the base band processing portion 102 adds PR to the frame outputted by the transmitting frame constructing portion 105, and constructs the descending burst. The constructed  
20 descending burst is transmitted from the RF transmitting portion 101 to the terminal 20 via the radio transmission path 40.

The transmission of the descending burst constructed as above is enabled after a control instruction from the polling cycle counting portion 106 or a transmission instruction of a  
25 retransmission request from a communication control portion (not

shown in the drawing) is issued, and at the time the carrier detecting portion 109 stops informing of the carrier detection. In this manner, the central unit 10 can transmit the polling to the terminal 20 at the predetermined polling cycle, without collision with the ascending burst.

Further, the central unit 10, when detecting that any frame has been discarded in the received ascending burst, can promptly transmit a retransmission request for the discarded frame(s) without collision with any ascending burst.

Referring back to FIG. 3, described is the processing carried out by the relay device 30 when receiving the polling transmitted from the central unit 10 (in descending direction). In the relay device 30, the RF receiving portion 303 receives the descending burst transmitted from the central unit 10 via the radio transmission path 40. The received burst is supplied to the base band processing portion 304.

The base band processing portion 304 establishes bit synchronization with the supplied descending burst by using PR, and establishes frame synchronization therewith by using UW. Thereafter, the base band processing portion 304 transfers the data following UW (SA to CRC) to the received frame analyzing portion 306 and the error detecting portion 309.

The error detecting portion 309 detects CRC error of the transferred data and informs the received frame analyzing portion 306 of any error detected. The received frame analyzing portion

306 confirms that DA in the transferred data indicates the address of the relay device 30, and if not informed of the error detection from the error detecting portion 309, transfers the entire frame including DNA to the address conversion portion 307.

5           The address conversion portion 307 stores correspondences between DNA and DA. The address conversion portion 307 searches for DA corresponding to DNA included in the frame transferred from the received frame analyzing portion 306, writes the search result into DA of the frame, and then transfers the frame to the  
10   transmitting frame constructing portion 305. Herein, the search by the address conversion portion 307 is preferably performed within the same time period for every address. Therefore, the search is typically performed on a principle that memory contents are outputted within the same time period upon selection of a  
15   memory address. As an alternative method of address conversion, the central unit 10 may determine the route from SNA to DNA and add information about the determined route as a group of DAs to every frame. In such manner, the address conversion portion 307 does not need to store the correspondences between DNA and DA as  
20   described above. Note, in this case, it is required to add such group of DAs indicating route information to each frame in FIGS. 4A and 4B. The present invention, however, is not restricted to any of the address conversion methods in exerting its effects.

          Next, the transmitting frame constructing portion 305  
25   rewrites SA in the frame transferred from the address conversion

portion 307 to that of the relay device 30. Thereafter, transmitting frame constructing portion 305 calculates CRC in the range from SA to the control region (Poll), and outputs the frame to the base band processing portion 302.

5       The base band processing portion 302, if not informed of the carrier detection from the carrier detecting portion 308, adds PR to the frame outputted by the transmitting frame constructing portion 305 and reconstructs the descending burst. The reconstructed descending burst is transmitted from the RF transmitting portion 301 to the terminal 20 via the radio transmission path 40.

10       Referring back to FIG. 2, in the terminal 20, the descending burst transmitted via the radio transmission path 40 is received by the RF receiving portion 203. The received burst is supplied to the base band processing portion 204.

15       The base band processing portion 204 establishes bit synchronization with the supplied descending burst by using PR, and establishes frame synchronization therewith by using UW. Thereafter, the base band processing portion 204 transfers the data following UW (SA to CRC) to the received frame analyzing portion 206 and the error detecting portion 207.

20       The error detecting portion 207 detects CRC error of the transferred data and informs the received frame analyzing portion 206 of any error detected. The received frame analyzing portion 206 confirms that DA indicates the address of the terminal 20,

and if not informed of the error detection from the error detecting portion 207, analyzes the control region (Poll). The received frame analyzing portion 206 outputs a polling detection signal, which is a signal informing that the polling is detected as a result of the analysis, to the base band processing portion 202 and a communication control portion (not shown) provided in the terminal 20.

Next, the procedure of data transmission, i.e., ascending transmission, is described. In the terminal 20, as described above, the received frame analyzing portion 206 outputs the polling detection signal to the base band processing portion 202 so as to instruct frame transmission. The transmitting frame constructing portion 205 is supplied with transmission data (Data) by the communication control portion (not shown) which was also supplied with the polling detection signal.

The transmitting frame constructing portion 205 sets the address of the terminal 20 to SA and SNA, the address of the relay device 30 to DA, and the network address of the central unit 10 to DNA. Thereafter, the transmitting frame constructing portion 205 calculates CRC with respect to SA, DA, SNA, DNA, and Data. In this way, the transmitting frame constructing portion 205 constructs n-frames (n is a natural number) for transmission.

The carrier detecting portion 208 detects that the RF receiving portion 203 is receiving a carrier and informs the base band processing portion 202 of the detection. Under the control

by the received frame analyzing portion 206 and the carrier detecting portion 208, the base band processing portion 202 adds PR to the head frame outputted by the transmitting frame constructing portion 205, and constructs an ascending burst. The ascending burst is transmitted from the RF transmitting portion 201 to the central unit 10 via the radio transmission paths 40. In such manner, the terminal 20 transmits, in response to a single polling, the ascending burst composed of the n-frames.

Next, by referring to FIG. 3, described is the processing carried out by the relay device 30 when receiving the data transmitted from the terminal 20 (in ascending direction). In the relay device 30, the ascending burst transmitted from the terminal 20 via the radio transmission path 40 is received by the RF receiving portion 303. The received burst is supplied to the base band processing portion 304.

The base band processing portion 304 establishes bit synchronization with the supplied ascending burst by using PR and establishes frame synchronization therewith by using UW. Thereafter, the base band processing portion 304 transfers the following data (SA to CRC) to the received frame analyzing portion 306 and the error detecting portion 309.

The error detecting portion 309 detects CRC error of the transferred data and informs the received frame analyzing portion 306 of any error detected. The received frame analyzing portion 306 confirms that DA indicates the address of the relay device

30, and if not informed of the error detection from the error detecting portion 309, transfers the entire frame including DNA to the address conversion portion 307.

The address conversion portion 307 stores correspondences  
5 between DNA and DA. The address conversion portion 307 searches for DA corresponding to DNA included in the frame transferred from the received frame analyzing portion 306, writes the search result into DA of the frame, and then transfers the frame to the transmitting frame constructing portion 305. As an alternative  
10 method of address conversion, the central unit 10 may determine the route from SNA to DNA and add information about the determined route as a group of DAs to every frame. In such manner, the address conversion portion 307 does not need to store the correspondences between DNA and DA for address conversion. Note, in this case,  
15 it is required to add such group of DAs indicating route information to each frame in FIGS. 4A and 4B. The present invention, however, is not restricted to any of the address conversion methods and in exerting its effects. Next, the transmitting frame constructing portion 305 rewrites SA in the  
20 frame transferred from the address conversion portion 307 to that of the relay device 30. Thereafter, transmitting frame constructing portion 305 calculates CRC in the range from SA to the data region, and outputs the frame to the base band processing portion 302.

25 The base band processing portion 302, if not informed of

the carrier detection from the carrier detecting portion 308, adds PR to the head frame outputted by the transmitting frame constructing portion 305 and reconstructs the ascending burst. The reconstructed ascending burst is transmitted from the RF transmitting portion 301 to the central unit 10 via the radio transmission path 40.

Next, by referring to FIG. 5, described is the data transmission method according to the first embodiment applied in the above described data transmission system. In FIG. 5, data F0 to F15 each indicate a frame. Each × denotes transmission error of a data frame. In the drawing, if no error occurs in UW and thus the base band processing portion succeeded in receiving a data frame, such × is marked at the end of a solid line arrow. If any error occurs in UW and thus the base band receiving portion failed to receive a data frame, such × is marked on the middle of a dotted line arrow.

For polling procedure, the central unit 10 firstly transmits a polling to the relay device 30. Thereafter, the relay device 30 transmits the polling to the terminal 20. In response thereto, the terminal 20 promptly returns the data frames (F0 to F15) in sequence.

The relay device 30 sequentially receives such data frames. Herein, the data frames F2, F6, F7, and F8 are detected to have error by the error detecting portion 309, and thus are discarded. The data frames F12 to F15 have error in UW, and thus are not



received by the base band processing portion 304. As a result, the frames exclusive of the above are subjected to address conversion in the address conversion portion 307, and then transferred to the transmitting frame constructing portion 305.

5 While the RF receiving portion 303 receives the data frames F0 to F15, the carrier detecting portion 308 informs the base band processing portion 302 of the carrier detection. These frames are thus not enabled for transmission yet. When the RF receiving portion 303 finishes receiving the data frame F15, no more carrier  
10 is detected. Accordingly, the carrier detecting portion 308 stops informing the base band processing portion 302 of the carrier detection. At the same instant, frame transmission to the central unit 10 is started sequentially from the data frame F0.

15 In this transmission, none of the error-detected frame is transmitted, enabling effective use of the transmission band. Further, the central unit 10, being the receiving end, similarly performs carrier-sensing. As a result, the central unit 10 transmits, without delay, a retransmission request for such  
20 error-detected frames immediately after the receipt of eight frames, also enabling effective use of the transmission band.

As described in the foregoing, according to the data transmission method of the first embodiment, with such structure that sequentially transmitting n-frames in response to a  
25 transmission right granted by a single polling, efficiency is

improved by n-times. Moreover, since the relay station is so structured as not to transmit error-detected frames, the efficiency is further increased. Still more, the relay station can smoothly move to the transmission procedure without collision  
5 with receiving frames. Further, the central station can request for retransmission of the error-detected frames which have not been received, without delay.

The data transmission system according to the first embodiment includes the relay device 30, but may include a  
10 plurality of relay devices. Or, in the data transmission system of this embodiment, the relay device 30 may not be included, and the central unit 10 and the terminal 20 may be connected via the radio transmission path 40. Even in such case, the central unit 10 can transmit a polling to the terminal 20 at a predetermined  
15 polling cycle without collision with the ascending burst.

Further, in the data transmission method according to the first embodiment, network addresses are used for routing. The network addresses are not necessarily used if the route is already fixed, or if a connection ID, or the like, is used.

20 Still further, according to the data transmission system of the first embodiment, the transmitting frame constructing portion 105 supplies the transmitting frame to the base band processing portion 102. Alternatively, a buffer or a frame storage portion may be provided between those constituents. In  
25 that case, the base band processing portion 102 controls the

buffer or the frame storage portion so as to receive the transmitting frame therefrom.

(Second Embodiment)

FIGS. 6 to 8 are block diagrams showing the structure of a system adopting a data transmission method according to a second embodiment of the present invention. FIGS. 9A and 9B are diagrams exemplary showing the structure of bursts used in the data transmission method according to the second embodiment. FIG. 10 is a diagram showing a sequence in the data transmission method according to the second embodiment. By referring to FIGS. 6 to 10, described are a method, system, and device for data transmission according to the second embodiment.

Referring to FIG 6, in the system adopting the data transmission method according to the second embodiment, similarly to the system in FIG. 1 adopting the data transmission method of the first embodiment, the central unit 10 and the terminal 20 are connected with each other via the relay device 30 and the radio transmission path 40. Therefore, in the second embodiment, description on the structure and operation identical to the system of the first embodiment is partially omitted, focusing on the differences.

In FIG. 6, the central unit 10 is not provided with the carrier detecting portion 109 of the central unit in FIG. 1, but is newly provided with a transmission timer management portion 601 receiving a signal from the received frame analyzing portion

107, a transmission timer acquiring portion 602, a transmission timer 603, a frame storage portion 110, and an initial value setting portion 604.

In FIG. 7, the terminal 20 is not provided with the carrier detecting portion 208 of the terminal in FIG. 2, but is newly provided with the transmission timer management portion 601, the transmission timer acquiring portion 602 receiving a signal from the received frame analyzing portion 206, the transmission timer 603, and the frame storage portion 110.

In FIG. 8, similarly to the relay device in FIG. 3, the relay device 30 is connected each other with the central unit 10 and the terminal 20 via the radio transmission path 40. The relay device 30 is not provided with the carrier detecting portion 308 of the relay device in FIG. 3, but is newly provided with the transmission timer management portion 601, the transmission timer acquiring portion 602 receiving a signal from the address conversion portion 307, a frame number management portion 801, the transmission timer 603, and the frame storage portion 110.

Next, by referring to FIGS. 9A and 9B, described is the structure of the bursts used in the data transmission method according to the second embodiment. FIG. 9A shows the structure of a descending burst which is transmitted from the central unit 10 to the terminal 20. FIG. 9B shows the structure of an ascending burst which is transmitted from the terminal 20 to the central unit 10.

The bursts in FIGS. 9A and 9B are mostly identical in structure to those in FIGS. 4A and 4B, respectively, and therefore, identical part is not described. The only difference observed in the bursts in FIGS 9A and 9B is that ST is newly inserted  
5 subsequent to DNA. In ST, a transmission timer value indicating a total frame time of following data frames is stored. The transmission timer value is typically the number of frames to be transmitted subsequent to the present frame. Accordingly, the total frame time can be easily obtained by multiplying such number  
10 of subsequent frames by a frame time per frame.

Referring back to FIG. 6, the procedure of polling transmission, i.e., descending transmission, is described. In the central unit 10, the frame storage portion 110 receives transmission data for temporary storage. The transmitting frame  
15 constructing portion 105 receives the transmission data from the frame storage portion 110 and constructs a frame. for storage in the frame storage portion 110. In the constructed frame, SA and SNA are set as the data link address and the network address of the central unit 10, DA is set as the data link address of the  
20 relay device 30, and DNA is set as the network address of the terminal 20. Thus constructed frame is stored in the frame storage portion 110.

Further, the transmission timer management portion 601 receives the number of frames which are to be transmitted  
25 subsequent to the transmitting frame currently being constructed

and sets the number as the transmission timer value ST. Herein,  
no frame is transmitted subsequent to the frame for polling. ST  
is thus set to 0. The polling cycle counting portion 106 works  
in the similar manner to that in the first embodiment. The  
5 transmission timer acquiring portion 602 acquires, from the  
received frame analyzing portion 107, the value set in ST of the  
received frame, and sets the value in the transmission timer 603.

The initial value setting portion 604 sets a predetermined  
initial value in the transmission timer 603 on either timing of  
10 issuance of a control signal corresponding to the polling cycle  
from the polling cycle counting portion 106 or issuance of  
instruction for transmitting a retransmission request.

The predetermined initial value is a value not less than  
the maximum transmission time possibly thought of. The maximum  
15 transmission time for the polling is typically obtained through  
calculation of: (the number of data frames + the number of polling  
frames)  $\times$  (the number of relay devices + 1)  $\times$  frame time per frame  
+ processing time, and for the retransmission request: (the number  
of retransmission frames + the number of retransmission request  
20 frames)  $\times$  (the number of relay devices + 1)  $\times$  frame time per frame  
+ processing time. Note herein that the number of the polling  
frames and the retransmission request frames are 1.

Assume herein that the number of frames transmitted in  
response to the polling is 16, and the transmission is made via  
25 a single relay device. In such case, the initial value is

determined as the sum of 2 frame time required for relay transmission of the polling, 32 frame time required for relay transmission of the 16 frames, and a time required for relay processing and response of the terminal (presumably 1 frame time).

- 5 The sum adds up to 35 frame time and is determined as the initial value.

The determination of the initial value surely is not limited to the above described case where the frame time is used as a unit time. Further, the description in the above is exemplarily made  
10 for a case where the initial value is obtained through calculation. The initial value, however, may be an actual measurement value or a predicted value.

The transmission timer 603 subtracts the value set therein by 1 every time the transmission time for one frame (frame time)  
15 passes, for example, and when the value reaches 0, gives permission for transmission to the base band processing part 102. As described above, the initial value is set in the transmission timer 603 on timing of polling transmission, and thereafter, the value is subtracted every time the transmission time passes.

20 In the meanwhile, the transmission timer acquiring portion 602 acquires, from the received frame analyzing portion 107, the value set in ST of every received frame, and sets the value in the transmission timer 603 every time of acquisition. Therefore, if no frame is received, the permission for transmission will not  
25 be given until the initial value, or the maximum transmission time,

set in the timer reaches 0. If even a single frame is received, the value set in ST of the received frame is set in the transmission timer 603. Accordingly, the permission for transmission will be given quicker based on the elapse of time indicated by ST.

5       Based on the control by the polling cycle counting portion 106 and the transmission timer 603, the base band processing portion 102 instructs the frame storage portion 110 to output data. Typically, the base band processing portion 102 outputs the clock for each frame to the frame storage portion 110. Based on the  
10       received clocks the frame storage portion 110 outputs the stored frames.

      The base band processing portion 102 adds PR to the head frame outputted by the frame storage portion 110, and constructs the descending burst. The constructed burst is transmitted from  
15       the RF transmitting portion 101 to the terminal 20 via the radio transmission path 40.

      The transmission of the descending burst is enabled when a control instruction from the polling cycle counting portion 106 or a transmission instruction of a retransmission request from  
20       a communication control portion (not shown in the drawing) is obtained, and also when the permission for transmission is obtained from the transmission timer 603. In this manner, the central unit 10 transmits the polling to the terminal 20 at the predetermined polling cycle, without collision with the ascending  
25       burst.



Further, when detecting that any frame is discarded in the received ascending burst, the central unit 10 can quickly transmit a retransmission request for the discarded frame without collision with any ascending burst.

5 Referring back to FIG. 8, described is the processing carried out by the relay device 30 when receiving the polling transmitted from the central unit 10 (in descending direction). In the relay device 30, the descending burst transmitted from the central unit 10 via the radio transmission path 40 is received  
10 by the RF receiving portion 303. The received descending burst is supplied to the base band processing portion 304.

The base band processing portion 304 establishes bit synchronization with the supplied descending burst by using PR, and establishes frame synchronization therewith by using UW.  
15 Thereafter, the base band processing portion 304 transfers the data following UW (SA to CRC) to the received frame analyzing portion 306 and the error detecting portion 309.

The error detecting portion 309 detects CRC error of the transferred data and informs the received frame analyzing portion  
20 306 of any error detected. The received frame analyzing portion 306 confirms that DA in the transferred data indicates the address of the relay device 30, and if not informed of the error detection from the error detecting portion 309, transfers the entire frame including DNA to the address conversion portion 307.

25 The address conversion portion 307 stores correspondences

between DNA and DA. The address conversion portion 307 searches for DA corresponding to DNA included in the frame transferred from the received frame analyzing portion 306, writes the search result into DA of the frame, and then transfers the frame to the frame storage portion 110, the transmitting frame number management portion 801, and the transmission timer acquiring portion 602. As an alternative method of address conversion, the central unit 10 may determine the route from SNA to DNA and adds information about the determined route as a group of DAs to every frame. In such manner, the address conversion portion 307 does not need to store the correspondences between DNA and DA for address conversion. Note, in this case, it is required to add such group of DAs indicating route information to each frame in FIGS. 9A and 9B. The present invention, however, is not restricted to any of the address conversion methods in exerting its effects. Next, the transmission timer acquiring portion 602 sets the acquired value of ST in the transmission timer 603. The transmitting frame number management portion 801 manages the number of frames to be transmitted in sequence, and informs the transmission timer management portion 601 of the number.

The transmitting frame constructing portion 305, for generation of the transmitting frame, refers to the frame temporarily stored in the frame storage portion 110 and rewrites SA of the frame to that of the relay device 30. The transmitting frame constructing portion 305 also sets ST of the stored frame

as the value informed from the transmission timer management portion 601. Thereafter, the transmitting frame constructing portion 305 again refers to the stored frame, calculates CRC in the range from SA to the control region (Poll) and sets thus  
5   calculated CRC in the frame.

Here again, ST is 0 as stated above, and accordingly, the transmission timer acquiring portion 602 acquires ST = 0. The transmission timer 603 thus gives the permission for transmission immediately. Then, the base band processing portion 302  
10   immediately instructs the frame storage portion 110 to output the frame stored therein, adds PR to the frame outputted by the frame storage portion 110 and reconstructs the descending burst. The reconstructed descending burst is transmitted from the RF transmitting portion 301 to the terminal 20 via the radio  
15   transmission path 40.

Referring back to FIG. 7, in the terminal 20, the descending burst transmitted via the radio transmission path 40 is received by the RF receiving portion 203. The received burst is supplied to the base band processing portion 204.

20   The base band processing portion 204 establishes bit synchronization with the supplied descending burst by using PR, and establishes frame synchronization therewith by using UW. Thereafter, the base band processing portion 204 transfers the data following UW (SA to CRC) to the received frame analyzing  
25   portion 206 and the error detecting portion 207.

The error detecting portion 207 detects CRC error of the transferred data and informs the received frame analyzing portion 206 of any error detected. The received frame analyzing portion 206 confirms that DA in the transferred frame indicates the address of the terminal 20, and if not informed of error detection from the error detecting portion 207, analyzes the control region (Poll). The received frame analyzing portion 206 outputs a polling detection signal, which is a signal informing that the polling is detected as a result of the analysis, to the base band processing portion 202 and a communication control portion (not shown) provided in the terminal 20. The transmission timer acquiring portion 602 acquires ST = 0 as the transmission timer value and sets the value 0 in the transmission timer 603.

Next, the procedure of data transmission, i.e., ascending transmission, is described. In the terminal 20, as described above, the received frame analyzing portion 206 outputs the polling detection signal to the base band processing portion 202 so as to instruct frame transmission. The frame storage portion 110 receives transmission data (Data) from the communication control portion (not shown) which was also supplied with the polling detection signal.

The transmitting frame constructing portion 205 refers to the frame stored in the frame storage portion 110 and sets the address of the terminal 20 to SA and SNA, the address of the relay device 30 to DA, and the network address of the central unit 10

to DNA. Thereafter, the transmitting frame constructing portion 205 calculates CRC with respect to SA, DA, SNA, DNA, and Data. In this way, the transmitting frame constructing portion 205 constructs n-frames (n is a natural number) for transmission.

5           At this point of time, ST = 0 is set in the transmission timer 603, meaning that the permission is already given for transmission. Based on the control by the received frame analyzing portion 206 and the transmission timer 603, the base band processing portion 202 immediately instructs the frame  
10 storage portion 110 to output the frames stored therein.

          The base band processing portion 202 adds PR to the head frame outputted by the frame storage portion 110 and constructs the ascending burst. The constructed ascending burst is transmitted from the RF transmitting portion 201 to the central  
15 unit 10 via the radio transmission path 40, without delay. In such manner, the terminal 20 transmits, in response to the single polling, the ascending burst composed of the n-frames.

          Next, by referring to FIG. 8, described is the processing carried out by the relay device 30 when receiving the data  
20 transmitted from the terminal 20 (in ascending direction). In the relay device 30, the ascending burst transmitted from the terminal 20 via the radio transmission path 40 is received by the RF receiving portion 303. The received burst is supplied to the base band processing portion 304.

25           The base band processing portion 304 establishes bit

synchronization with the supplied ascending burst by using PR,  
and establishes frame synchronization therewith by using UW.  
Thereafter, the base band processing portion 304 transfers the  
data following UW (SA to CRC) to the received frame analyzing  
5 portion 306 and the error detecting portion 309.

The error detecting portion 309 detects CRC error of the  
transferred data and informs the received frame analyzing portion  
306 of any error detected. The received frame analyzing portion  
306 confirms that DA indicates the address of the relay device  
10 30, and if not informed of the error detection from the error  
detecting portion 309, transfers the entire frame including DNA  
to the address conversion portion 307.

The address conversion portion 307 stores correspondences  
between DNA and DA. The address conversion portion 307 searches  
15 for DA corresponding to DNA included in the frame transferred from  
the received frame analyzing portion 306, writes the search result  
into DA of the frame, and then transfers the frame to the frame  
storage portion 110, the transmitting frame number management  
portion 801, and the transmission timer acquiring portion 602.  
20 As an alternative address conversion method, the central unit 10  
may determine the route from SNA to DNA and adds information about  
the determined route as a group of DAs to every frame. In such  
manner, the address conversion portion 307 does not need to store  
the correspondences between DNA and DA for address conversion.  
25 Note, in this case, it is required to add such group of DAs

indicating route information to each frame in FIGS. 9A and 9B. The present invention, however, is not restricted to any of the address conversion methods in exerting its effects.

The transmission timer acquiring portion 602 acquires the  
5 transmission timer value ST in the received frame without error,  
and sets the value in the transmission timer 603. The  
transmission timer 603 typically stores the value in a unit of  
transmission time for one frame and subtracts the value by 1 every  
time such transmission time passes. When the value reaches 0,  
10 the transmission timer 603 gives permission for transmission to  
the base band processing portion 302 and informs the transmitting  
frame number management portion 801 of the completion of the  
receiving procedure.

In response thereto, the transmitting frame number  
15 management portion 801 informs the number of the received frames  
without error to the transmission timer management portion 601.  
The transmission timer management portion 601 controls the  
transmitting frame constructing portion 305 so as to calculate,  
for each transmitting frame, the number of frames to be  
20 sequentially transmitted subsequent thereto based on the informed  
number of the frames, and to set the calculated value as ST in  
each frame.

The transmitting frame constructing portion 305 rewrites  
SA of each frames stored in the frame storage portion 110 to that  
25 of the relay device 30, and calculates CRC in the range from SA

to the data region. The transmitting frame constructing portion 305 also refers the stored frames one by one and sets ST as the value obtained by subtracting 1, in this example, from the value of ST set in the frame immediately before. The transmitting  
5 frame constructing portion 305 gives permission for transmission to the base band processing 302 at the instant of completing construction of frame 0 and writing the same in the frame storage portion 110.

Here, the base band processing portion 302 is prohibited  
10 from frame transmission until the permission is given by the transmission timer 603, that is, until the relay device 30 completes receiving the n-frames from the terminal 20. When the permission for transmission is given both by the transmitting timer 603 and the transmitting frame constructing portion 305,  
15 the base band processing portion 302 instructs the frame storage portion 110 to output the frames stored therein. The base band processing portion 302 adds PR to the head frame outputted by the frame storage portion 110 and reconstructs the ascending burst. The reconstructed ascending burst is transmitted from the RF  
20 transmitting portion 301 to the central unit 10 via the radio transmission path 40.

Next, by referring to FIG. 10, described in detail is the data transmission method according to the second embodiment applied in the above described data transmission system. In FIG.  
25 10, data F0 to F15 each indicate a frame and ST = 15 to ST = 0



each indicate the transmission timer value ST in each frame. Each  
× denotes transmission error of a data frame. If no error occurs  
in UW and thus the base band processing portion succeeded in  
receiving a data frame, such × is marked at the end of a solid  
5 line arrow. If any error occurs in UW and thus the base band  
receiving portion failed to receive a data frame, such × is marked  
on the middle of a dotted line arrow.

For polling procedure, the central unit 10 firstly  
transmits a polling to the relay device 30. Thereafter, the relay  
10 device 30 transmits the polling to the terminal 20. In response,  
the terminal 20 promptly returns the data frames (F0 to F15) in  
sequence.

The relay device 30 sequentially receives such data frames.  
Herein, the data frames F6, F7, and F8 are detected to have error  
15 by the error detecting portion 309, and thus are discarded.  
Further, the data frames F12 to F15 have error in UW, and thus  
are not received by the are not received by the base band processing  
portion 304. As a result, the frames exclusive of the above are  
subjected to address conversion in the address conversion portion  
20 307, and then transferred to the transmitting frame constructing  
portion 305.

The transmission timer acquiring portion 602 acquires the  
value of ST in the received frame without error and sets the value  
in the transmission timer 603 as the transmission timer value.  
25 In this example, the transmission timer acquiring portion 602

acquires the values  $ST = 15$  to  $ST = 10$  in sequence and accordingly overwrites the transmission timer value.

From  $ST = 9$  to  $ST = 7$ , the transmission timer acquiring portion 602 stops setting the transmission timer value.

5 Nevertheless, the transmission timer 603 keeps on subtracting the transmission timer value for every one frame, as described above. Then, the transmission timer acquiring portion 602 starts overwriting the transmission timer value again from  $ST = 6$  until  $ST = 4$ .

10 After that, the transmission timer acquiring portion 602 stops setting the transmission timer value, but the transmission timer 603 keeps on subtraction. When the data frame F15 is completely received, the transmission timer value reaches 0, i.e., time out. The transmission is thus permitted.

15 As such, the transmission timer 603 does not permit transmission while the data F0 to F15 are being received. As a result, the transmission of such data is started, sequentially from the data F0, at the instant when the reception of the data frame F15 is complete and when the transmission frame constructing  
20 portion 305 gives permission for transmission.

In this transmission, none of the error-detected frame is transmitted, enabling effective use of the transmission band. Further, the transmitting frame number management portion 801 counts the number of the frame to be transmitted, and based on  
25 the counted number, the transmission timer management portion 601

sequentially resets the value of ST. The central unit 10, being the receiving end, similarly performs transmission control using a transmission timer. Accordingly, the central unit 10 transmits, without delay, a retransmission request for such error-detected frames immediately after the receipt of nine frames, also enabling effective use of the transmission band.

Further, the initial value is set in the transmission timer 603 of the central unit 10 and is subtracted every time the transmission time passes. In this manner, even not receiving a single frame, the central unit 10 can transmit the retransmission request for the frames which have not been received, as described above.

As described in the foregoing, according to the data transmission method of the second, with such structure that sequentially transmitting n-frames in response to a transmission right granted by a single polling, efficiency is improved by n-times. Moreover, since the relay station does not transmit error-detected frames, the efficiency is further increased. Still more, the relay station can smoothly move to the transmission procedure without collision with any receiving frame even in a case where some frames out of the n-frames are not received due to radio transmission error.

The data transmission method of the second embodiment does not apply carrier-sensing in the physical layer as in the first embodiment. In this aspect, the data transmission method of this

embodiment is especially effective when complicated processing is required for the carrier-sensing such as when spread-spectrum communication using FH (frequency hopping) technique is performed and when a communication system is structured for each of the  
5 physical layer, data link layer and network layer.

The data transmission system according to the second embodiment includes the relay device 30, but may include a plurality of relay devices. Or, in the data transmission system of this embodiment, the relay device 30 may not be included, and  
10 the central unit 10 and the terminal 20 may be connected via the radio transmission path 40. Even in such case, the central unit 10 can transmit a polling to the terminal 20 at a predetermined polling cycle without collision with the ascending burst.

Further, in the data transmission method according to the  
15 second embodiment, network addresses are used for routing. The network addresses are not necessarily used if only the route is already fixed, or if a connection ID, or the like, is used.

While the invention has been described in detail, the foregoing description is in all aspects illustrative and not  
20 restrictive. It is understood that numerous other modifications and variations can be devised without departing from the scope of the invention.

WHAT IS CLAIMED IS:

1. A data transmission method for communication between first and second transmission devices transmitting/receiving a data frame by using a single transmission path, comprising the steps of:

5 detecting, at said first transmission device, that a carrier used for signal transmission of the data frame does not exist on said transmission path for confirming that said transmission path is available,

transmitting one or more data frames in sequence from said  
10 first transmission device when said carrier does not exist,

detecting, at said second transmission device, that said carrier does not exist on said transmission path for confirming that said transmission path is available when received one or more of the data frames transmitted from said first transmission device,  
15 and

transmitting one or more data frames in sequence from said second transmission device when said carrier does not exist.

2. A data transmission method for communication between first and second transmission devices transmitting/receiving a data frame via a relay device by using a single transmission path, comprising the steps of:

5 detecting, at said relay device, when received one or more

data frames transmitted from said first transmission device, an error in each of the received data frames;

setting, at said relay device, only the data frame in which no error was detected as a data frame to be transmitted,

10 detecting, at said relay device, that said carrier does not exist on said transmission path for confirming that said transmission path is available; and

transmitting one or more data frames in sequence from said relay device to said second transmission device when said carrier  
15 does not exist.

3. A data transmission method for communication between first and second transmission devices transmitting/receiving a data frame including a transmission timer value indicating a total frame time of data frames subsequent thereto by using a single  
5 transmission path, comprising the steps of:

sequentially transmitting n-data-frames (where n is an arbitrary natural number) each including the transmission timer value set to indicate (n - k) frame time (where k is an arbitrary natural number showing sequential order of transmission) from  
10 said first transmission device;

detecting, at said second transmission device that has received one or more of the data frames each including said transmission timer value, the transmission timer value included in an error-free data frame among the received data frames;

15 managing, at said second transmission device, an elapse of  
the total frame time of the subsequent data frames by using the  
detected transmission timer value and managing an elapse of a time  
period by using a predetermined initial value when no transmission  
timer value is detected, for confirming that said transmission  
20 path is available; and

transmitting one or more data frames in sequence from said  
second transmission device when said transmission path is  
confirmed being available.

4. The data transmission method according to claim 3,  
wherein

said transmission path is implemented by radio transmission  
in an arbitrary frequency band.

5. The data transmission method according to claim 3,  
wherein

said initial value is determined as the maximum time  
required for error-free transmission of all of said data frames.

6. The data transmission method according to claim 3,  
wherein

in said step of detecting said transmission timer value,  
the transmission timer value is detected from every error-free  
5 data frame among the data frames received by said second

transmission device; and

in said step of confirming that said transmission path is available, an elapse of the total frame time of the subsequent data frames is started to be managed every time said transmission  
10 timer value is detected.

7. A data transmission method for communication between first and second transmission devices transmitting/receiving a data frame including a transmission timer value indicating a total frame time of data frames subsequent thereto via a relay device  
5 by using a single transmission path, comprising the steps of:  
sequentially transmitting n-data-frames (where n is an arbitrary natural number) each including the transmission timer value set to indicate (n - k) frame time (where k is an arbitrary natural number showing sequential order of transmission) from said  
10 first transmission device;

detecting, at said relay device that has received one or more of the data frames each including said transmission timer value, an error in each of the received data frames;

detecting, at said relay device, the transmission timer  
15 value included in an error-free data frame among the received data frames;

setting, at said relay device, m-data frames (where m is a natural number not more than n) in which no error was detected as data frames to be transmitted;



20           setting, at said relay device, the transmission timer value  
for each of the data frames set as the data frames to be transmitted  
so as to indicate  $(m - k)$  frame time;

          managing, at said relay device, an elapse of the total frame  
time of the subsequent data frames by using the detected  
25   transmission timer value for confirming that said transmission  
path is available; and

          transmitting one or more data frames in sequence from said  
relay device to said second transmission device when said  
transmission path is confirmed being available.

30

8.       The data transmission method according to claim 7,  
wherein

          said transmission path is implemented by radio transmission  
in an arbitrary frequency band.

9.       The data transmission method according to claim 7,  
wherein

          in said step of detecting said transmission timer value,  
the transmission timer value is detected from every error-free  
5   data frame among the data frames received by said relay device;  
and

          in said step of confirming that said transmission path is  
available, an elapse of the total frame time of the subsequent  
data frames is started to be managed every time said transmission

10 timer value is detected.

10. A data transmission system for communication between first and second transmission devices transmitting/receiving a data frame by using a single transmission path, wherein

said first and second transmission devices each comprise:

5 a receiving portion for receiving the data frame;

a carrier detecting portion for detecting that a carrier used for signal transmission of the data frame does not exist on said transmission path; and

10 a transmitting portion for transmitting the data frame, and

said second transmission device that has received one or more of the data frames transmitted from said first transmission device detects, by said carrier detecting portion provided therein, that the carrier does not exist on said transmission path  
15 to confirm that said transmission path is available, and then transmits one or more data frames in sequence.

11. A data transmission system for communication between first and second transmission devices transmitting/receiving a data frame via a relay device by using a single transmission path, wherein

5 said first and second transmission devices each comprise:

a first receiving portion for receiving the data

frame;

a first carrier detecting portion for detecting that  
a carrier used for signal transmission of the data frame does not  
10 exist on said transmission path; and

a first transmitting portion for transmitting the  
data frame,

said relay device comprises:

a second receiving portion for receiving the data  
15 frame;

a second carrier detecting portion for detecting that  
the carrier used for signal transmission of the data frame does  
not exist on said transmission path;

an error detecting portion for detecting an error in  
20 the data frame received by said second receiving portion;

a received frame analyzing portion for setting the  
data frame in which no error was detected by said error detecting  
portion as a data frame to be transmitted; and

a second transmitting portion for transmitting the  
25 data frame, and

said relay device, when received one or more of the data  
frames transmitted from said first transmission device, detects,  
by said second carrier detecting portion provided therein, that  
the carrier does not exist on said transmission path to confirm  
30 that said transmission path is available, and then transmits one  
or more of said data frames to be transmitted to said second

transmission device in sequence.

12. A data transmission system for communication between first and second transmission devices transmitting/receiving a data frame including a transmission timer value indicating a total frame time of data frames subsequent thereto by using a single  
5 transmission path, wherein

said first and second transmission devices each comprise:

a receiving portion for receiving the data frame including said transmission timer value;

a transmission timer acquiring portion for acquiring  
10 the transmission timer value included in the data frame received by said receiving portion;

a transmission timer for suspending transmission for a frame time indicated by the transmission timer value acquired by said transmission timer acquiring portion, and when none of  
15 said timer values is acquired, suspending transmission for a time indicated by a predetermined initial value;

a transmitting frame constructing portion for constructing a data frame to be transmitted including the transmission timer value so set as to indicate the total frame  
20 time of the data frames subsequent thereto; and

a transmitting portion for transmitting the data frame to be transmitted constructed by said transmitting frame constructing portion, and

said second transmission device, when received one or more  
25 of the data frames transmitted from said first transmission device,  
confirms, by said transmission timer provided therein, that said  
transmission path is available through an elapse of the time of  
suspending transmission, and then transmits one or more of the  
data frames to be transmitted constructed by said transmitting  
30 frame constructing portion in sequence.

13. The data transmission system according to claim 12,  
wherein

said transmission path is implemented by radio transmission  
in an arbitrary frequency band.

14. The data transmission system according to claim 12,  
wherein

said initial value is determined as the maximum time  
required for error-free transmission of all of said data frames.

15. A data transmission system for communication between  
first and second transmission devices transmitting/receiving a  
data frame including a transmission timer value indicating a total  
frame time of data frames subsequent thereto via a relay device  
5 by using a single transmission path, wherein

said first and second transmission devices each comprise:

a first receiving portion for receiving the data

frame including said transmission timer value;

10 a first transmission timer acquiring portion for  
acquiring the transmission timer value included in the data frame  
received by said first receiving portion;

a first transmission timer for suspending  
transmission for a frame time indicated by the transmission timer  
value acquired by said first transmission timer acquiring portion,  
15 and when none of said timer values is acquired, suspending  
transmission for a time indicated by a predetermined initial  
value;

a first transmitting frame constructing portion for  
constructing a data frame to be transmitted including the  
20 transmission timer value so set as to indicate the total frame  
time of data frames subsequent thereto; and

a first transmitting portion for transmitting the  
data frame to be transmitted constructed by said first  
transmitting frame constructing portion,  
25 said relay device comprises:

a second receiving portion for receiving the data  
frame including said transmission timer value;

an error detecting portion for detecting an error in  
the data frame received by said second receiving portion;

30 a received frame analyzing portion for setting the  
data frame in which no error was detected by said error detecting  
portion as a data frame to be transmitted;

a second transmission timer acquiring portion for acquiring the transmission timer value included in an error-free  
35 data frame among the received data frames;

a second transmission timer for suspending transmission for a frame time indicated by the transmission timer value acquired by said second transmission timer acquiring portion,

40 a second transmitting frame constructing portion for constructing a data frame to be transmitted including the transmission timer value so set as to indicate the total frame time of the data frames subsequent thereto; and

a second transmitting portion for transmitting the  
45 data frame to be transmitted constructed by said second transmitting frame constructing portion, and

said relay device, when received one or more of the data frames transmitted from said first transmission device, confirms, by said second transmission timer provided therein, that said  
50 transmission path is available through an elapse of the time of suspending transmission, and then transmits one or more of the data frames to be transmitted constructed by said second transmitting frame constructing portion to said second transmission device in sequence.

16. The data transmission system according to claim 15, wherein

said transmission path is implemented by radio transmission in an arbitrary frequency band.

17. A transmission device for transmitting/receiving a data frame by using a single transmission path, comprising:

a receiving portion for receiving the data frame;

a carrier detecting portion for detecting that a carrier used for signal transmission of the data frame does not exist on said transmission path; and

a transmitting portion for transmitting the data frame, and

when received one or more data frames, detecting, by said carrier detecting portion provided therein, that the carrier does not exist on said transmission path to confirm that said transmission path is available, and then transmitting one or more data frames in sequence.

18. A relay device for relaying data transmission from a first transmission device transmitting a data frame to a second transmission device by using a single transmission path, comprising:

a receiving portion for receiving the data frame;

a carrier detecting portion for detecting that a carrier used for signal transmission of the data frame does not



exist on said transmission path;

10            an error detecting portion for detecting an error in  
the data frame received by said receiving portion;

             a received frame analyzing portion for setting only  
the data frame in which no error was detected by said error  
detecting portion as a data frame to be transmitted; and

15            a transmitting portion for transmitting said data  
frame to be transmitted, and

             when received one or more data frames transmitted from said  
first transmission device, detecting, by said carrier detecting  
portion, that the carrier does not exist on said transmission path

20            to confirm that said transmission path is available, and then  
transmitting one or more of said data frames to be transmitted  
to said second transmission device in sequence.

19.    A transmission device for transmitting/receiving a  
data frame including a transmission timer value indicating a total  
frame time of data frames subsequent thereto by using a single  
transmission path, comprising:

5            a receiving portion for receiving the data frame  
including said transmission timer value;

             a transmission timer acquiring portion for acquiring  
the transmission timer value included in the data frame received  
by said receiving portion;

10            a transmission timer for suspending transmission for

a frame time indicated by the transmission timer value acquired by said transmission timer acquiring portion, and when none of said timer values is acquired, suspending transmission for a time indicated by a predetermined initial value;

- 15           a transmitting frame constructing portion for constructing a data frame to be transmitted including the transmission timer value so set as to indicate the total frame time of the data frames subsequent thereto; and

- 20           a transmitting portion for transmitting the data frame to be transmitted constructed by said transmitting frame constructing portion, and

- when received one or more data frames, confirming, by said transmission timer, that said transmission path is available through an elapse of the time of suspending transmission, and then  
25   transmitting one or more of the data frames to be transmitted constructed by said transmitting frame constructing portion in sequence.

20. The transmission device according to claim 19, wherein

said initial value is determined as the maximum time required for error-free transmission of all of said data frames.

21. A relay device for relaying data transmission from a first transmission device transmitting a data frame including

a transmission timer value indicating a total frame time of data frames subsequent thereto, to a second transmission device by  
5 using a single transmission path, comprising:

a receiving portion for receiving the data frame including said transmission timer value;

an error detecting portion for detecting an error in the data frame received by said receiving portion;

10 a received frame analyzing portion for setting only the data frame in which no error was detected by said error detecting portion as a data frame to be transmitted;

a transmission timer acquiring portion for acquiring the transmission timer value included in the data frame received  
15 by said receiving portion;

a transmission timer for suspending transmission for a frame time indicated by the transmission timer value acquired by said transmission timer acquiring portion;

a transmitting frame constructing portion for  
20 constructing a data frame to be transmitted including the transmission timer value so set as to indicate the total frame time of the data frames subsequent thereto; and

a transmitting portion for transmitting the data frame to be transmitted constructed by said transmitting frame  
25 constructing portion, and

when received one or more data frames transmitted from said first transmission device, confirming, by said transmission timer,

that said transmission path is available through an elapse of the  
time of suspending transmission, and then transmitting one or more  
30 of the data frames to be transmitted constructed by said  
transmitting frame constructing portion to said second  
transmission device in sequence.

# ABSTRACT OF THE DISCLOSURE

A system including a central unit 10, a terminal 20, and a relay device 30 relay transmission of isochronous data effectively, in a time-sharing manner. The central unit 10 cyclically carries out the polling. In response to the polling, the terminal 20 transmits a plurality of frames. The relay device 30 detects that the plurality of frames transmitted from the terminal 20 via a transmission path 40 are completely received based on carrier-sensing by a carrier detecting portion 308 incorporated in the relay device 30. The relay device 30, at the time of detection, transmits frames received thereby without error to the central unit 10.

FIG. 1

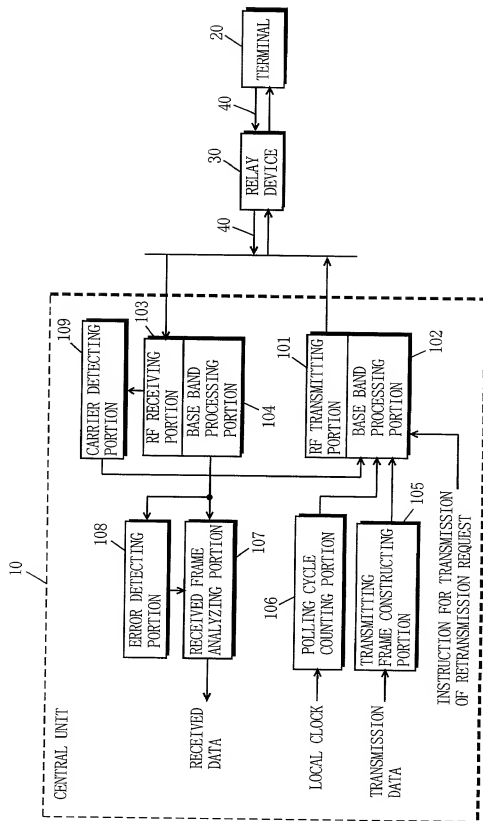


FIG. 2

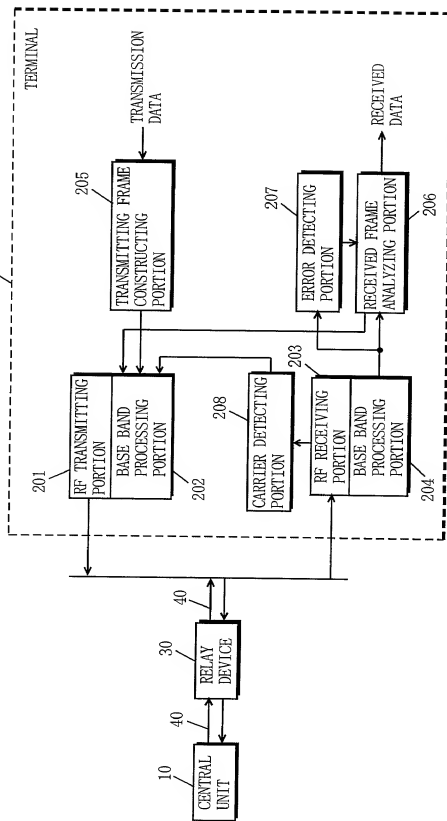


FIG. 3

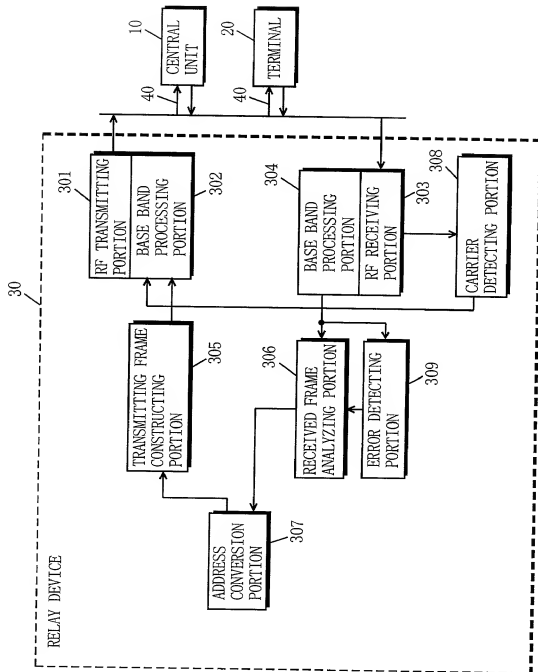




FIG. 4 A




FIG. 4 B




FIG. 5

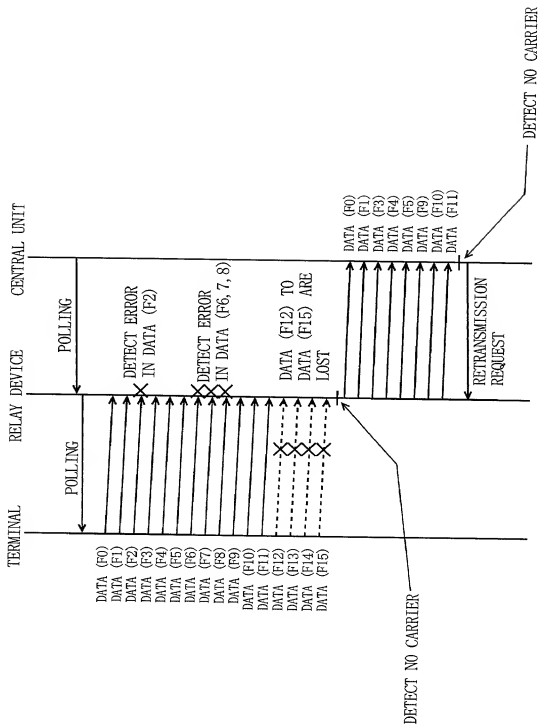


FIG. 6


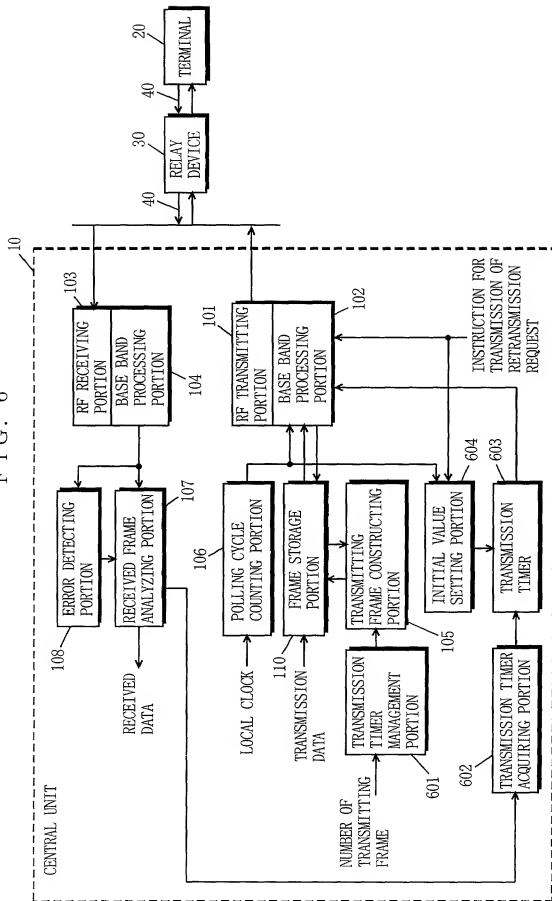


FIG. 7

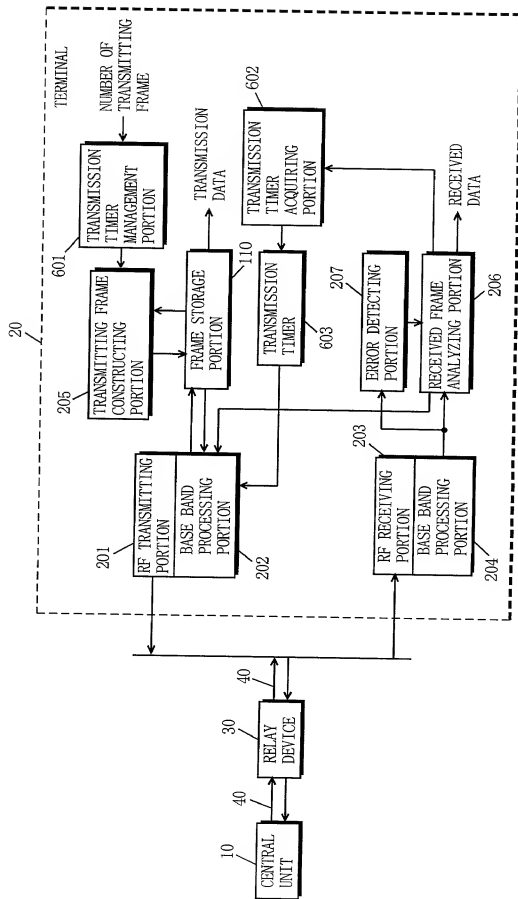

F I G . 8

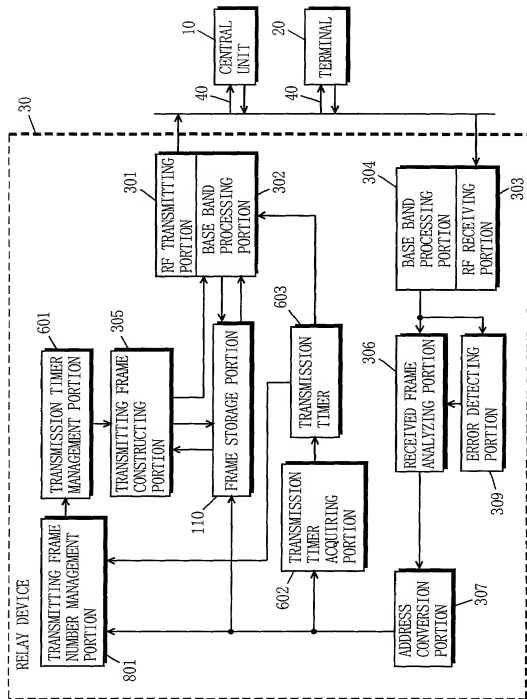


FIG. 9 A




FIG. 9 B




FIG. 10

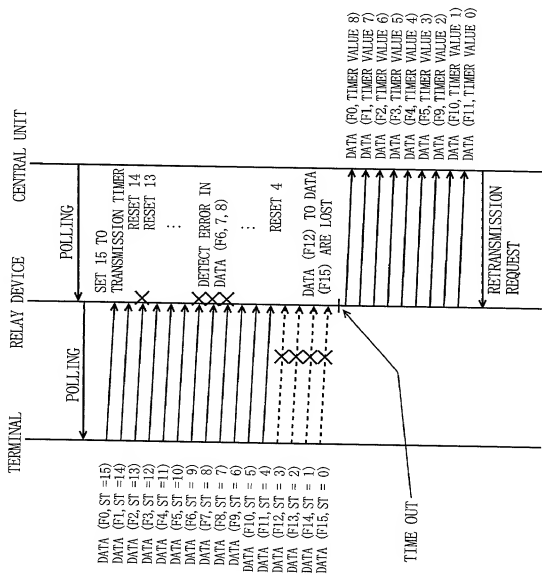


FIG. 11 PRIOR ART


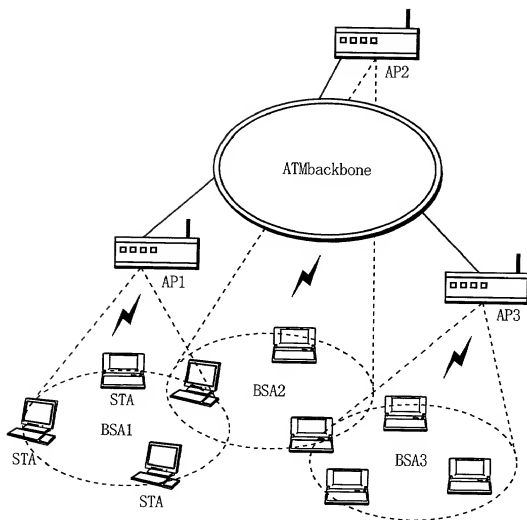




FIG. 12 PRIOR ART

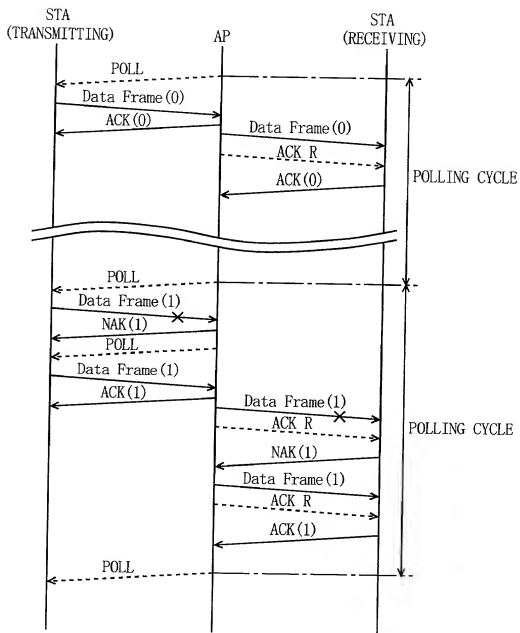

- > : ASCENDING CHANNEL CONTROL INFORMATION
- > : FRAME (NORMAL)
- X——> : FRAME (ERROR)

# DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION

☒ Original    ☐ Supplemental    ☐ Substitute    ☐ PCT    ☐ Design

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: DATA TRANSMISSION METHOD AND SYSTEM, AND DEVICE USED THEREFOR

of which is described and claimed in:

- ☒ the attached specification, or  
☐ the specification in the application Serial No. \_\_\_\_\_ filed \_\_\_\_\_;  
and with amendments through \_\_\_\_\_ (if applicable), or  
☐ the specification in International Application No. PCT/ \_\_\_\_\_, filed \_\_\_\_\_, and as amended  
on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	318319/1999	November 9, 1999	Yes

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint John T. Miller, Reg. No. 21,120; Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nolton, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils E. Pedersen, Reg. No. 33,145 and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from Ogasawara Patent Office as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

WENDEROTH, LIND & PONACK, L.L.P.  
2033 K Street, N.W., Suite 800  
Washington, DC 20006

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.  
Area Code (202) 721-8200

Direct Facsimile Messages to:  
Area Code (202) 721-8250

Full Name of First Inventor	FAMILY NAME KUROBE	FIRST GIVEN NAME Akio	SECOND GIVEN NAME
Residence & Citizenship	CITY Tondabayashi	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 4-12-7, Tsuzuyamadai, Tondabayashi-shi, Osaka-fu, Japan	CITY	STATE OR COUNTRY ZIP CODE 584-0086
Full Name of Second Inventor	FAMILY NAME IKEDA	FIRST GIVEN NAME Koji	SECOND GIVEN NAME
Residence & Citizenship	CITY Neyagawa	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 23-14-102, Nakakamida-cho, Neyagawa-shi, Osaka-fu, Japan	CITY	STATE OR COUNTRY ZIP CODE 572-0053
Full Name of Third Inventor	FAMILY NAME KURODA	FIRST GIVEN NAME Go	SECOND GIVEN NAME
Residence & Citizenship	CITY Izumisano	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS 3-2-5, Minamiizumigaoka, Izumisano-shi, Osaka-fu, Japan	CITY	STATE OR COUNTRY ZIP CODE 598-0073
Full Name of Fourth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

<b>Full Name of Fifth Inventor</b>	<b>FAMILY NAME</b>	<b>FIRST GIVEN NAME</b>	<b>SECOND GIVEN NAME</b>
<b>Residence &amp; Citizenship</b>	<b>CITY</b>	<b>STATE OR COUNTRY</b>	<b>COUNTRY OF CITIZENSHIP</b>
<b>Post Office Address</b>	<b>ADDRESS</b>	<b>CITY</b>	<b>STATE OR COUNTRY ZIP CODE</b>
<b>Full Name of Sixth Inventor</b>	<b>FAMILY NAME</b>	<b>FIRST GIVEN NAME</b>	<b>SECOND GIVEN NAME</b>
<b>Residence &amp; Citizenship</b>	<b>CITY</b>	<b>STATE OR COUNTRY</b>	<b>COUNTRY OF CITIZENSHIP</b>
<b>Post Office Address</b>	<b>ADDRESS</b>	<b>CITY</b>	<b>STATE OR COUNTRY ZIP CODE</b>
<b>Full Name of Seventh Inventor</b>	<b>FAMILY NAME</b>	<b>FIRST GIVEN NAME</b>	<b>SECOND GIVEN NAME</b>
<b>Residence &amp; Citizenship</b>	<b>CITY</b>	<b>STATE OR COUNTRY</b>	<b>COUNTRY OF CITIZENSHIP</b>
<b>Post Office Address</b>	<b>ADDRESS</b>	<b>CITY</b>	<b>STATE OR COUNTRY ZIP CODE</b>

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor Akio Kurobe Date November 1, 2000  
 Akio KUROBE  
 2nd Inventor Koji Ikeda Date November 1, 2000  
 Koji IKEDA  
 3rd Inventor Go Kuroda Date November 1, 2000  
 Go KURODA  
 4th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
 5th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
 6th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
 7th Inventor \_\_\_\_\_ Date \_\_\_\_\_

The above application may be more particularly identified as follows:

U.S. Application Serial No. \_\_\_\_\_ Filing Date \_\_\_\_\_  
 Applicant Reference Number FP-0693 Atty Docket No. \_\_\_\_\_  
 Title of Invention DATA TRANSMISSION METHOD AND SYSTEM, AND DEVICE USED THEREFOR